

PITONS À OEIL ACIER PAO

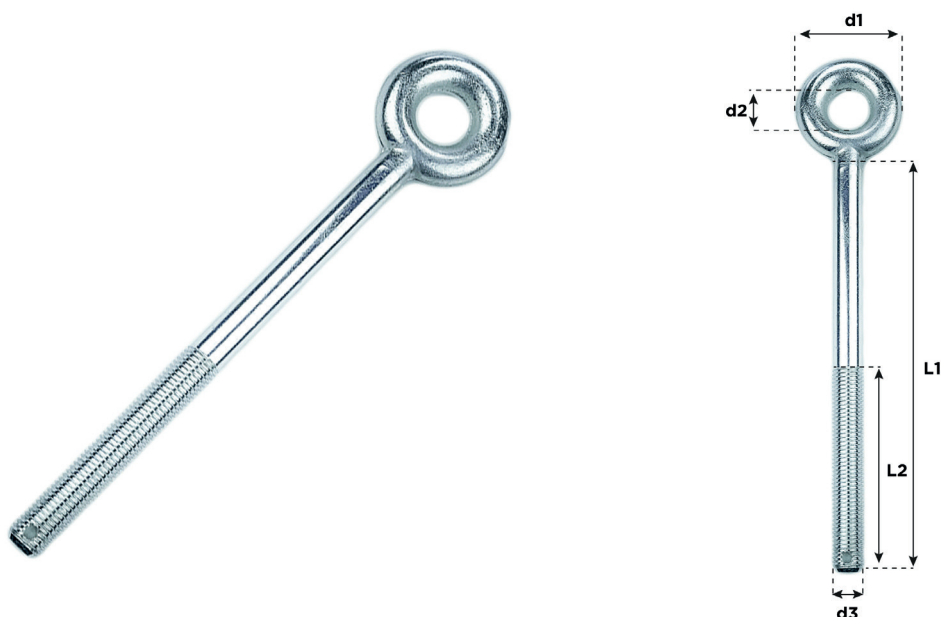


Tableau des mesures

Code	Charge de rupture	Câble	d1	d2	d3	L1	L2
	t	ø mm	mm	mm	mm	mm	mm
PAO12/115/110	4,3	6-8	50	26	M12	115	110
PAO12/235/60	4,3	6-8	50	26	M12	235	60
PAO12/325/150	4,3	6-8	50	26	M12	325	150
PAO12/500/150	4,3	6-8	50	26	M12	500	150
PAO14/125/110	4,4	8	42	18	M14	125	110
PAO16/140/130	6	9-11	46	20	M16	140	130
PAO16/243/120	8	9-11	51,4	22	M16	243	120
PAO16/324/200	8	9-11	51,4	22	M16	324	200
PAO16/474/200	8	9-11	51,4	22	M16	474	200
PAO18/155/140	7,6	9-11	52	22	M18	155	140
PAO20/166/155	10	12-13	57	25	M20	166	155
PAO20/256/120	12,4	12-13	67,6	27,7	M20	256	120
PAO20/316/200	12,4	12-13	67,6	27,7	M20	316	200
PAO20/416/200	12,4	12-13	67,6	27,7	M20	416	200
PAO24/235/180	14	16	70	30	M24	235	180
PAO24/417/150	17,9	16	65	27	M24	417	150